

# TARALAY PREMIUM

---



**Gerflor**<sup>®</sup>  
theflooringgroup




# TARALAY PREMIUM

## THE HEAVY TRAFFIC SOLUTION




# TARALAY PREMIUM

## EXCEEDS REQUIREMENTS

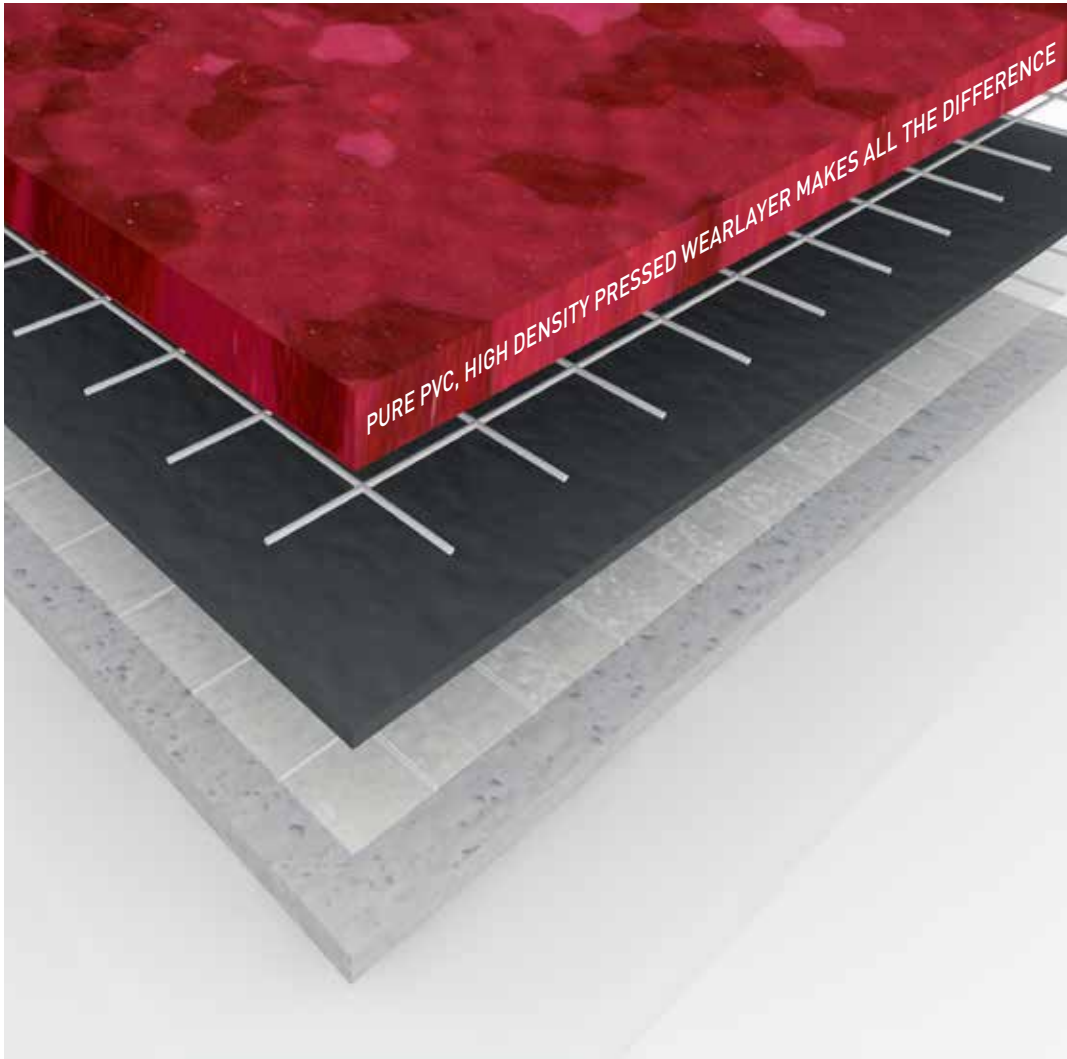

- **Stands up to intensive traffic**
- **Long lasting appearance**
- **Eco-responsible from start to finish**

# TARALAY PREMIUM OFFERS A DECORATING SOLUTION THAT EXCEEDS EXPECTATIONS

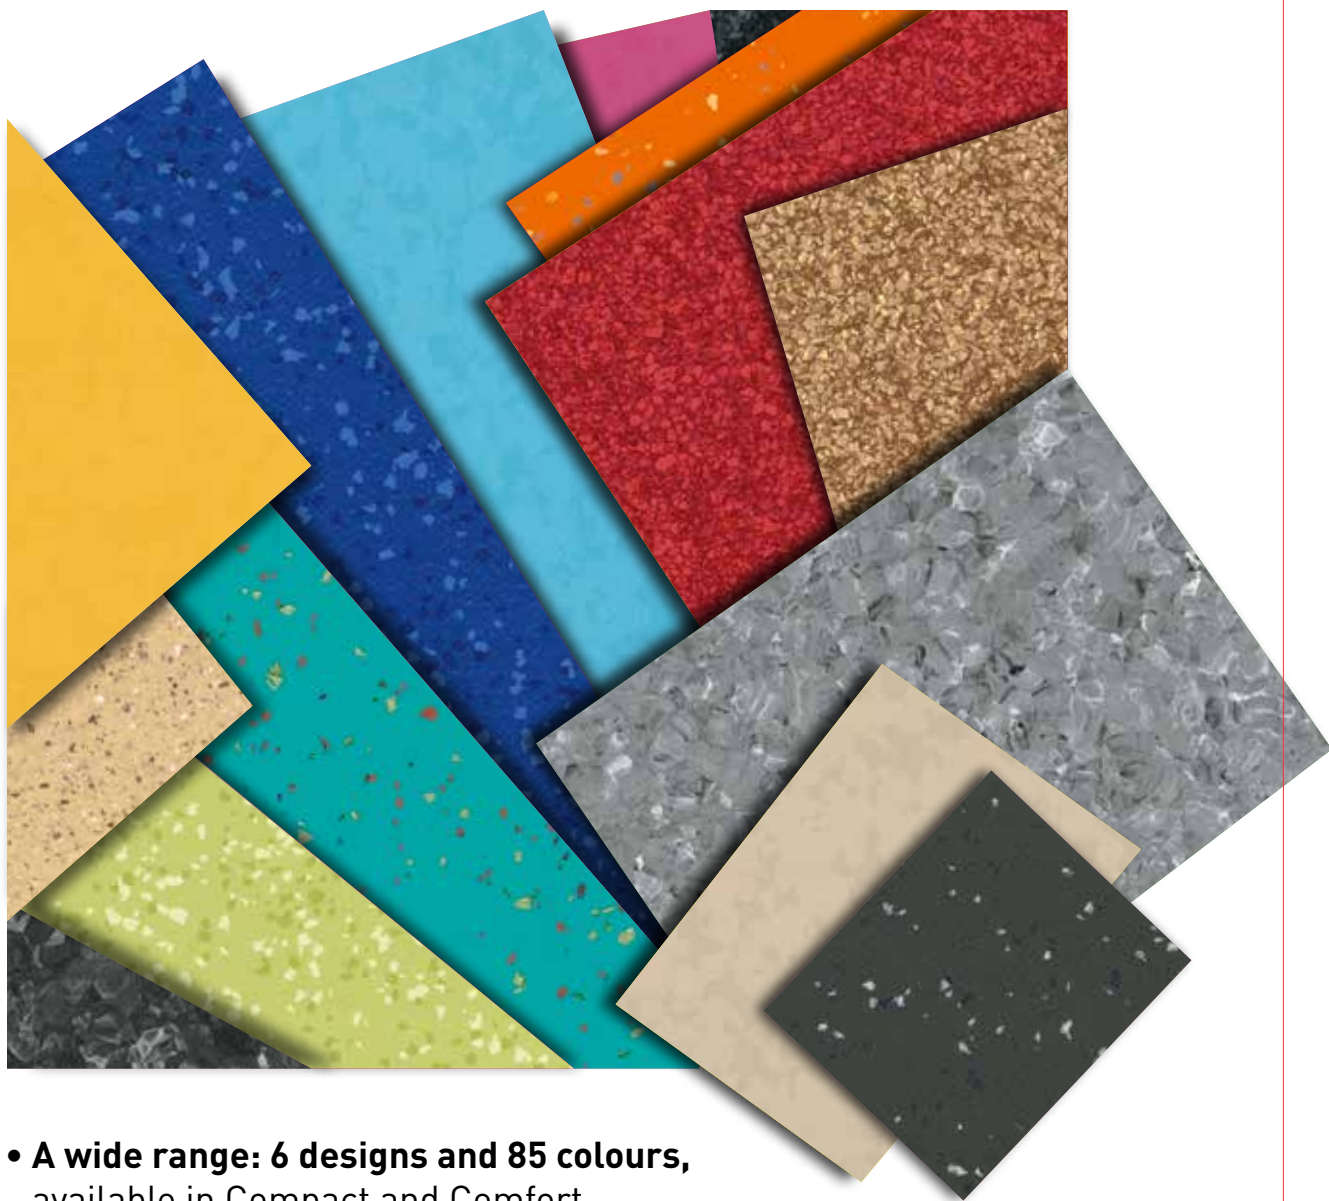

- **A wide range: 6 designs and 85 colours,** available in Compact and Comfort
- **Matt effect**
- **Infinite colour combinations** with My Taralay
- **Complete solutions** from floors to walls





# OSMOZ COMPACT









9330 Moon




9302 Atlas



9002 Pulsar




9753 Energy




9719 Eclipse



9127 Meteorite




9506 Himalia



9745 Cosmic



9415 Celeste



9310 Tethys

# METALLICA

COMPACT





4001 Ofu



4002 Manua



4003 Tao\*



8837 Songo



4343 Tokelau\*




3788 Nauru



8053 Anambas\*



4004 Pago\*



3705 Sumbawa




4009 Tufoa




4029 Baduna



8262 Rodrigues




8059 Nicobar



8057 Socotra

\* Product available as Taralay Premium & Taralay Premium Dry-Tex™

# INDIANA COMPACT



4015 Guinea



4526 Lasia



4469 Pemba



4476 Wattaru



4475 Felidu



8254 Samui



8242 Masirah



4142 Penang



4146 Moheli




4133 Agalega




4135 Aldabra



4140 Mahe



4145 Madura



4141 Zanzibar





# BRAZILIA COMPACT



8269 Ipanema




8157 Goias




4136 Sao Luis



8577 Amazonas



4477 Maceio




4478 Copacabana




4481 Estancia




3734 Almerim



8736 Recife



3709 Ceara



3707 Paraiba




8386 Boa Vista




4729 Mato Grosso



4342 Juara




4329 Bacabal



8062 Campinas






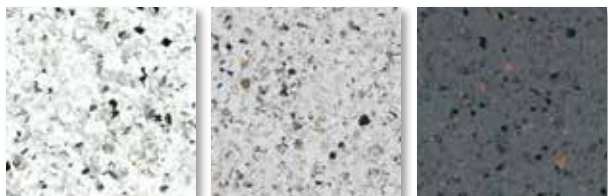

4743 Nublo

4794 Tamanca


4746 Jaguar

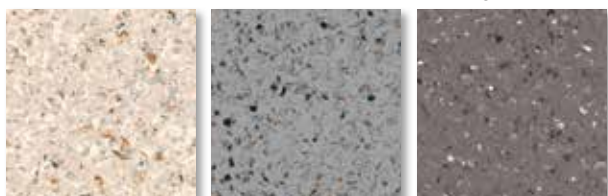

8387 Balsa

4752 Sombra

8191 Meseta

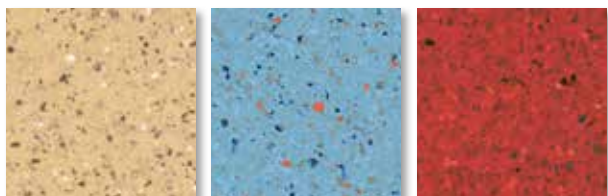


8395 Caballo

4454 Ara

8183 Volcan

# COSTA RICA

COMPACT

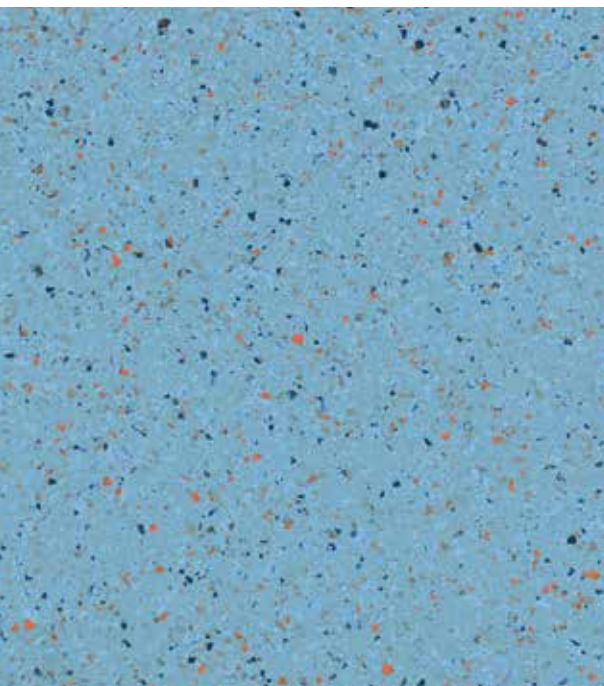








4753 Cotopaxi




4741 Lanzarote



4749 Vesuvio



4745 Lopevi




4748 Kamchatka

# FUSION COMPACT





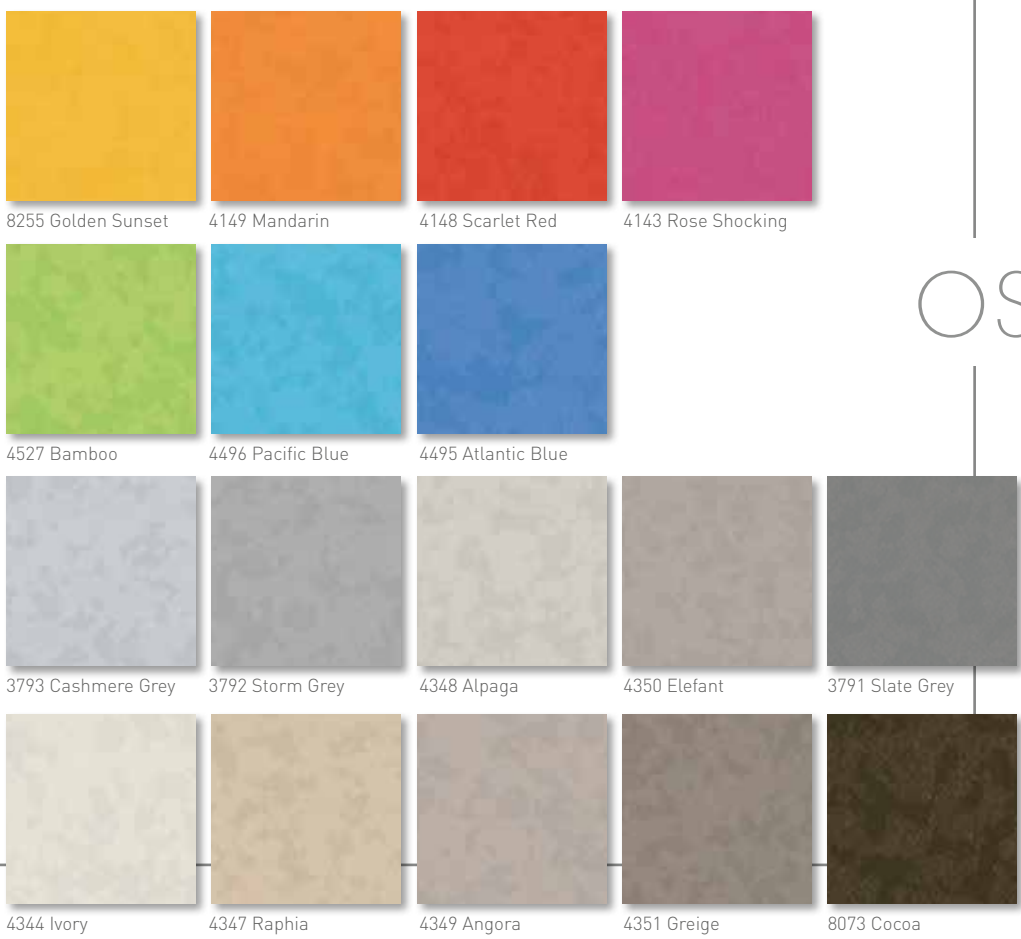

# OSMOZ COMFORT





4001 Ofu



4002 Manua



4003 Tao




8837 Songo



4343 Tokelau




3788 Nauru



8053 Anambas



4004 Pago



3705 Sumbawa




4009 Tufoa




4029 Baduna



8262 Rodrigues




8059 Nicobar



8057 Socotra

# INDIANA COMFORT



4015 Guinea



4526 Lasia



4469 Pemba



4476 Wattaru



4475 Felidu




8254 Samui



8242 Masirah



4142 Penang



4146 Moheli




4133 Agalega




4135 Aldabra




4140 Mahe



4145 Madura



4141 Zanzibar

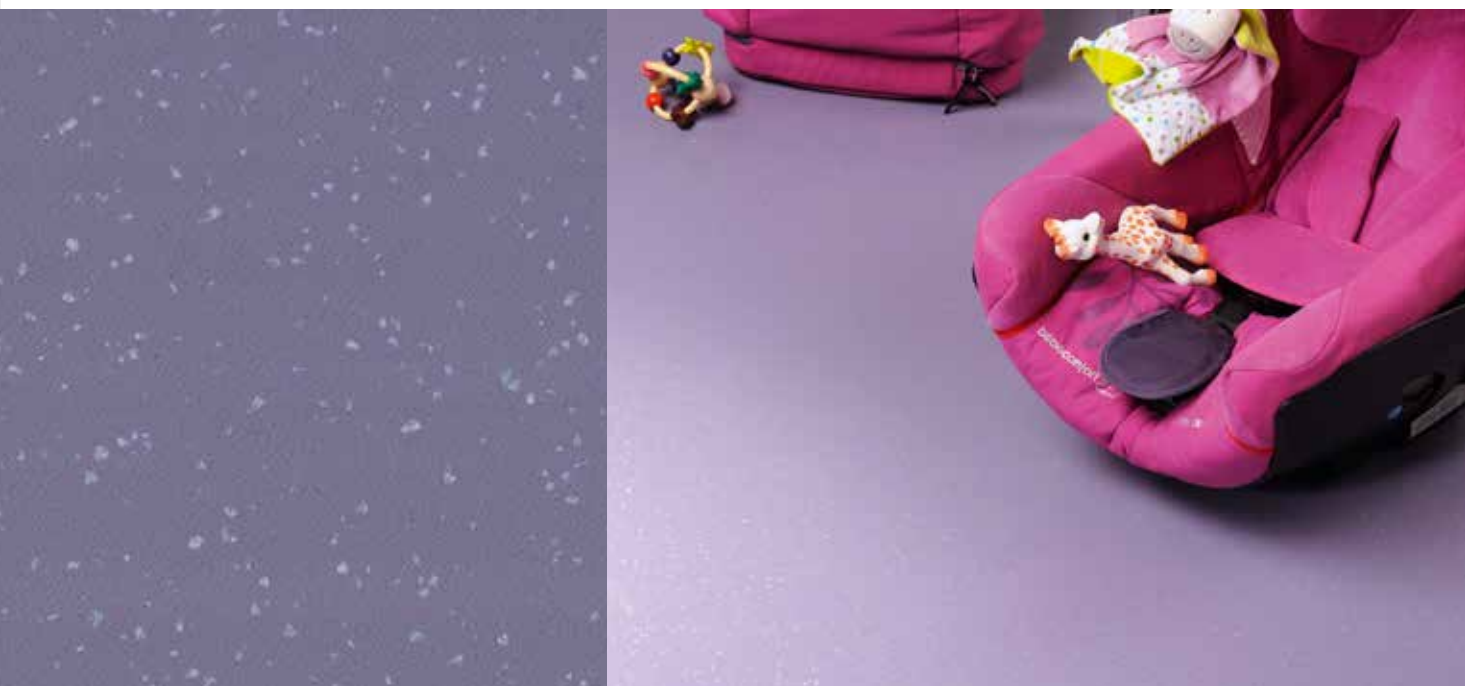



# BRAZILIA

COMFORT




8269 Ipanema



8157 Goias




8577 Amazonas



4477 Maceio



3734 Almerim




8736 Recife




8386 Boa Vista



4342 Juara



3709 Ceara



3707 Paraiba






# METALLICA

COMFORT



9330 Moon



9745 Cosmic



9753 Energy



9719 Eclipse






# COSTA RICA

COMFORT




4743 Nublo




4794 Talamanca




4746 Jaguar



4752 Sombra




8191 Meseta

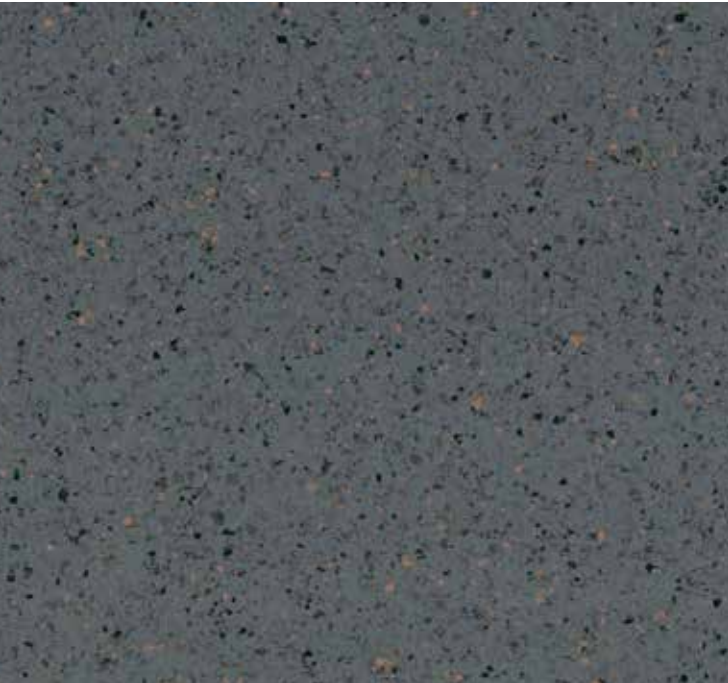

Taralay Premium Comfort

CREATE YOUR DECOR WITH

*My Taralay*

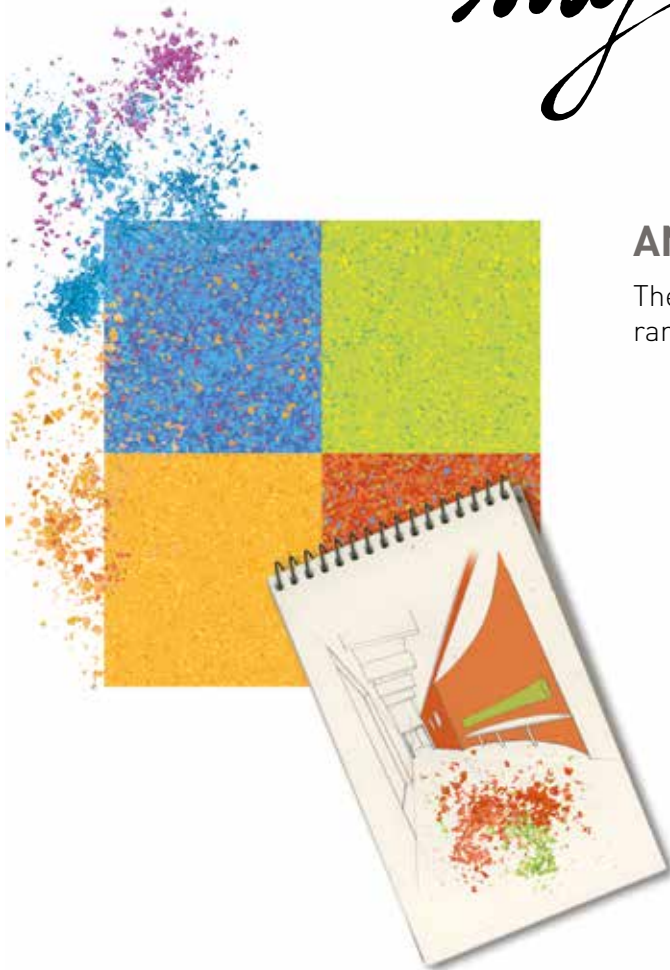

### AN EXCLUSIVE CONCEPT

The performance of the **Taralay Premium** range in the colours of your choice.

You want to **surprise** people with **flooring in harmony with space and light**, Gerflor gives you the **freedom** to build your own **unique decoration projects**.

**Express your emotions, make up your own atmosphere, reinvent floors with My Taralay.**




My Taralay creation  
Brazilia  
Education - France


# HOW IT WORKS?

## 1 Select a design type


*layout*



Brazilia type



Indiana type




Fusion type



Osmoz type

## 2 Choose your granules

*palette*

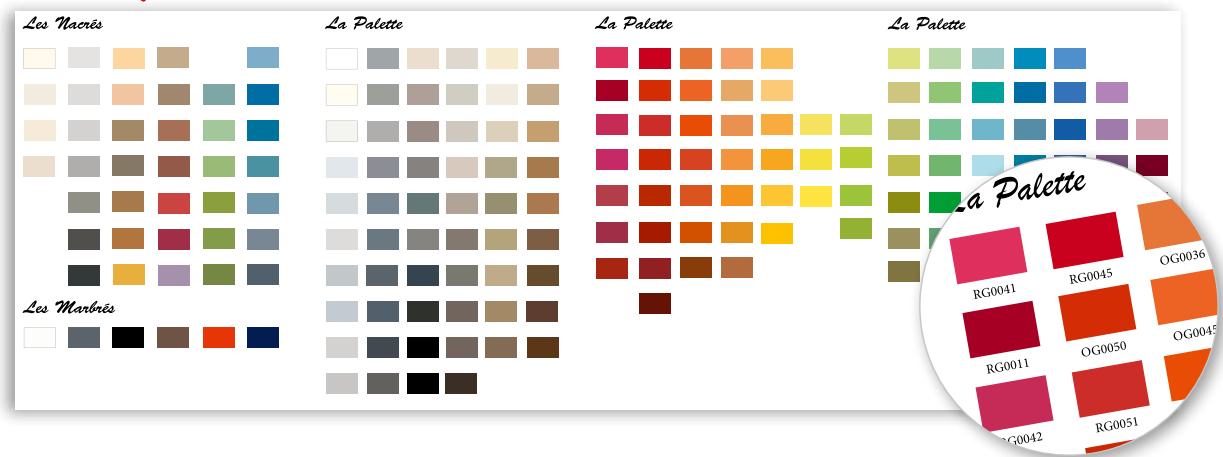

## 3 Visualise your harmonies

and order online on

[mytaralaybygerflor.com](http://mytaralaybygerflor.com)



**NEW**

# TARALAY PREMIUM DRY-TEX™



## ROLL SOLUTION: ▶ SUITABLE FOR HIGH MOISTURE SUBFLOORS

### EMERGENCY DEPARTMENTS

- Reception areas
- Waiting rooms
- Corridors


### A UNIQUE FULL-SPREAD ADHESIVE & COVERING SOLUTION

Eliminates the installation of an interposition barrier to prevent rising damp (interposition underlayer, Resin, Separate slab)



### MOISTURE CONTENT OF CONCRETE SLAB

Proven resistance up to 98% RH / 15 lbs moisture according to ASTM F2170 & ASTM F1869

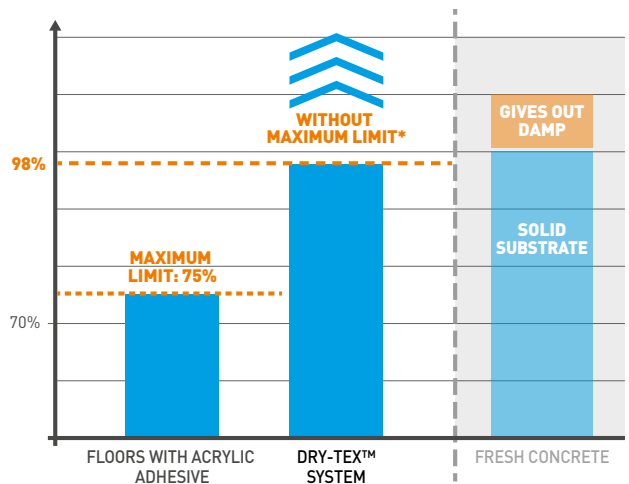

\*The substrate must not give out moisture.

TARALAY PREMIUM DRY-TEX™ is the best alternative to the installation of an interposition barrier which ensures:

#### Financial savings:

up to 25% cheaper!

- Reduced labour and material cost

#### Time savings:

a few minutes instead of several weeks!

- Reduced screed drying
- Reduced substrate preparation
- Easy installation


#### Performance

- Excellent moisture resistance
- Resistance to heavy traffic

#### Comfort and safety

- Easy rolling of beds and stretchers
- Slip resistance
- Acoustic insulation (compared to ceramic tiles)

**PATENTED SYSTEM  
ONLY BY GERFLOR**

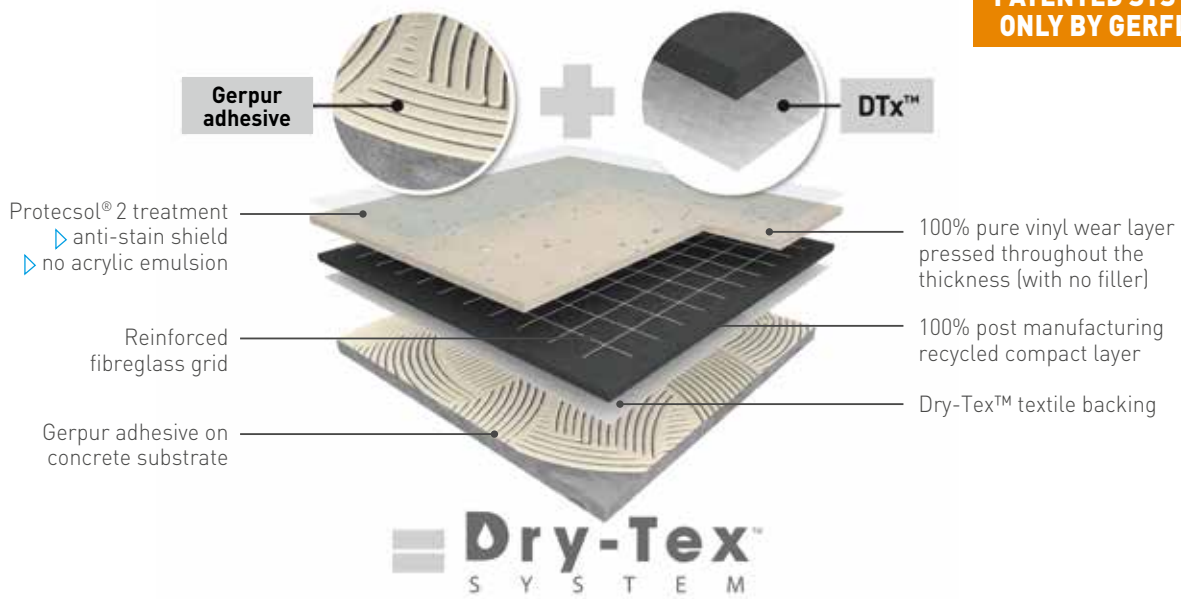

## ONE-STEP, FULL-SPREAD ADHESIVE INSTALLATION


The only moisture mitigation system integrated in the backing of the flooring

IDEAL SOLUTION FOR CONCRETE SLABS:

- ▷ RENOVATION AND NEW CONSTRUCTION
- ▷ SLAB-ON-GROUND AND DEEP CRAWL SPACE

A continuous adhesive film is absorbed by the non-woven backing.

The adhesive sticks completely to the concrete slab, regardless of the humidity level.

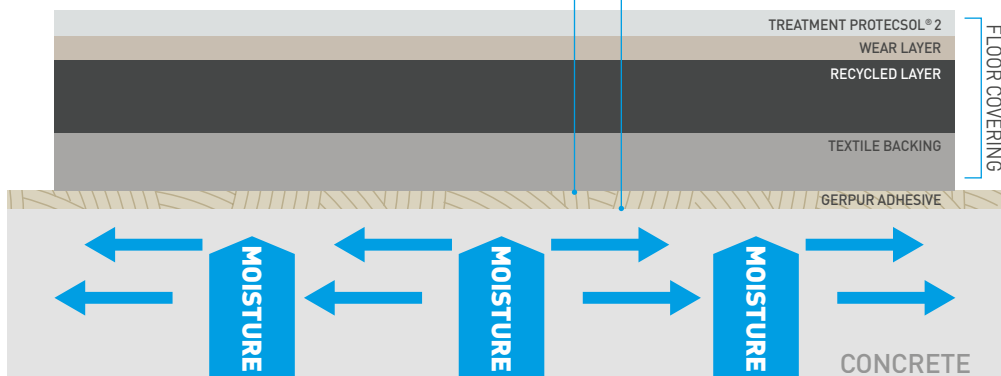


**NEW**


# TARALAY PREMIUM DRY-TEX™

ALL PREMIUM'S PERFORMANCES

## INDIANA\* Compact



4343 Tokelau



8053 Anambas




4004 Pago




4003 Tao


*\*All Taralay Premium Compact designs are available as Taralay Premium Dry-TEX™ for a minimum order quantity of 2400 sqm*

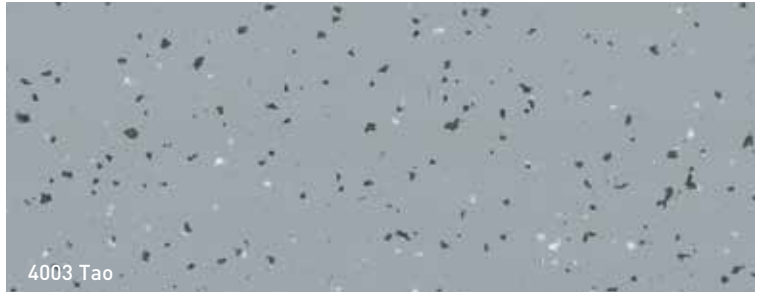

4003 Tao

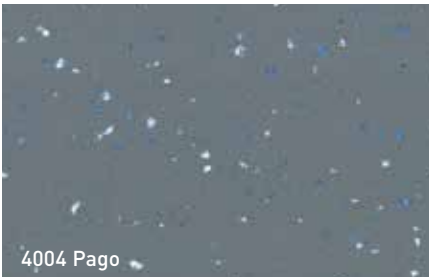

4004 Pago

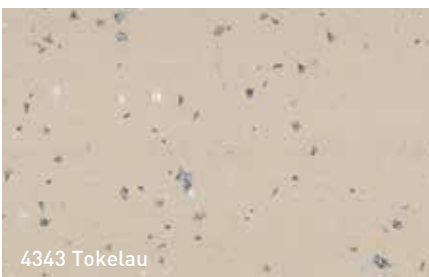

4343 Tokelau



8053 Anambas

**TARALAY PREMIUM DRY-TEX™ SYSTEM** includes TARALAY PREMIUM DRY-TEX™ and **GERPUR glue**.

This system provides a complete moisture mitigation in full-spread adhesive installation eliminating interposition barrier for any slab with high moisture (up to 98%RH).

**TARALAY PREMIUM DRY-TEX™** is a multi-layered calendered and pressed vinyl floorcovering, with no filler and a group T wear rating, available in 2m wide sheet.

The product comprises a **1mm thick homogeneous, pure vinyl wear layer incorporating very densely pressed coloured chips, with a matt finish and without transparent wearlayer.**

The product comprises a 100% post-manufacturing compact reinforced with a glass fiber grid and a non-woven backing. The product offers **8dB sound insulation, an indentation resistance of 0.06mm and eases heavy rolling loads.**

**TARALAY PREMIUM DRY-TEX™** is treated with **Protacosol®2**, a surface treatment obtained by UV laser crosslinking. This Protacosol®2 ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids stain of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

It is composed of 40% of minerals and inexhaustible materials.

It is made of 100% controlled recycled materials.

It does not contain any heavy metals or CMR 1&2 and they are 100% compliant with REACH.

The products emission rate of volatile organic compounds is **<10µg/m³ (TVOC after 28 days – ISO 16000-6).**

It is 100% recyclable.

## TARALAY PREMIUM DRY-TEX™

### DESCRIPTION

Total thickness	EN 428	mm	2.50
Thickness of wearlayer	EN 429	mm	1.02
Weight	EN 430	g/m²	2660
Width of sheet	EN 426	cm	200
Length of sheet	EN 426	ml	20

### CLASSIFICATION

Norm / Product specification	-	-	EN 649
European classification	EN 685	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance <sup>(1)</sup>	DIN 51 130	class	R10


### PERFORMANCES

Wear resistance	EN 660.2	mm³	≤ 2.0
Wear group	EN 649 / EN 651	group	T
Type Binder content	ISO 10582	type	I
Dimensional stability	EN 434	%	≤ 0.40
Impact sound insulation	EN ISO 717-2	dB	8
Residual indentation (requirement)	EN 433	mm	≤ 0.10
Residual indentation (value)	-	mm	0.03
Castor chair test (type W)	EN 425	-	OK
Thermal conductivity	EN 12 524	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	<b>Protacosol®2</b>
Chemical product resistance <sup>(2)</sup>	EN 423	-	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) <sup>(3)</sup>	ISO 22196	-	> 99 % inhibits growth

### ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000-6	µg/m³	< 10
Certification	-	-	Floorscore™

### CE MARKING

CE	EN 14041	

<sup>(1)</sup> For lifetime sustainable wet resistance, please refer to Tarasafe ranges.

<sup>(2)</sup> Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

<sup>(3)</sup> The implementation of an effective cleaning regime is the most important defence against infection.

# TARALAY PREMIUM

## THE PROOF IS IN THE EXPERIENCE!



“ With 600 000 passengers per year plus their luggage and luggage carts, this offers the advantage of standing up to heavy traffic while remaining easy to maintain. ”

**Pau-Pyrénées Airport, France**

“ I realise every day the Taralay Premium durability in comparison with a standard flooring: one is difficult to maintain, Taralay Premium is clean and perfect. ”

**12 years old elementary school in Nurmo, Finland**





“ For 20 years, this mass-coloured print has always been satisfactory. We’ve never had any problems with tears, scratches or wheel marks. ”

**Hospital in Lons-le-Saunier, France**

“ I am impressed with the bright and colourful palette of the Taralay Premium. I will now work with these colours in all my projects. ”


**Architect agency in Istanbul, Turkey**

“ After 10 years of intensive use, the Taralay Premium is still in excellent condition, which is something we are extremely pleased with. The same type of flooring has been used for other schools in our fondation, so we are in a good position to make a comparison. Taralay Premium comes out on top, each and every time. ”

**Primary school De Meander in Ootmarsum, Nederlands**

# WHAT MAKES THIS FLOORING UNIQUE?

THE DIFFERENCE IS IN THE DETAILS

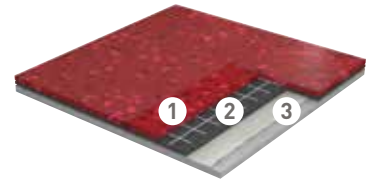

## 1 Wearlayer

### TARALAY PREMIUM

High density pressed wearlayer



Cross-section


Taralay Premium<sup>(1)</sup>

- > 1 mm
- Pressed under **800** tonnes
- 100 % PVC
- No transparent wearlayer


### OTHER FLOORING<sup>(1)</sup>



**Printed flooring with transparent wearlayer**  
Air bubbles: dirt traps



**Homogeneous flooring**  
Fillers: fragile and subject to scratches



**Coated flooring**  
Irregular density: dirt traps



**Rubber flooring**  
Porous and elastic: lower wear resistance and difficult to maintain

(1) Identical scale, enlarged 200 times



	Wear resistance	Scratch resistance	Soiling resistance	Colour durability	Yellowing effect resistance
<b>TARALAY PREMIUM</b>	★★★	★★★	★★★	★★★	★★★
<b>Printed flooring</b>	★	★★	★	★★	★
<b>Homogeneous flooring</b>	★	★	★★	★★	★★
<b>Coated flooring</b>	★★	★★	★	★★	★★
<b>Rubber flooring</b>	★	★★	★	★	★★

## 2 Reinforcement

### TARALAY PREMIUM

A double reinforced glass fiber grid



Perfect stability

### OTHER FLOORING





Fragile veil: lower stability

## 3 Foam



### TARALAY PREMIUM

Very high density foam

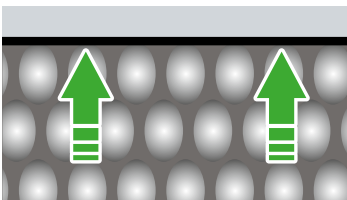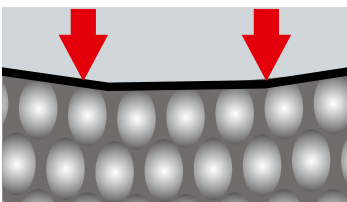

Closed and regular ovoid cells ease the roll of heavy loads

### OTHER FLOORING

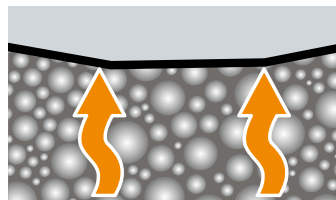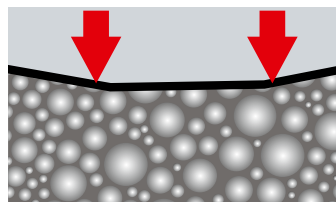

Irregular shaped and sized cells reduce the resistance to indentation




		Ease of rolling	Dimensional stability	Resistance to indentation
<b>TARALAY PREMIUM</b>	Double glass fiber grid Very high density foam	★★★★	★★★★	★★★★
<b>Other flooring</b>	Standard veil Standard foam	★	★	★★



# ALL THE ADVANTAGES OF PROTECSOL<sup>®</sup>, AND MORE!

**PROTECSOL<sup>®</sup> 2 technology** combines all the advantages of Protecsol<sup>®</sup>, tested and approved over 20 years ago: ease of maintenance, no need for wax and polish for life, water and detergent savings, plus **two additional benefits**:

## 1 Stain shield, blocks even the toughest stains

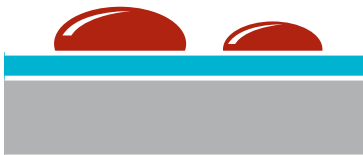

The **PROTECSOL<sup>®</sup> 2** water-repellent effect prevents staining products from penetrating the materials (alcohol-based Eosin and Betadine, hydro-alcoholic gels, etc.), remaining on the surface.



All other product on the market let staining product penetrate the floor covering.

### STAINING TESTS

Marker / Eosin / Betadine



### RESULTS AFTER CLEANING

Using a neutral detergent or an eraser for marker	<b>TARALAY PREMIUM</b>	Printed flooring / transparent wearlayer	Homogeneous flooring	Coated flooring	Rubber flooring
After 10 min →					
After 1h →					

Complete stain resistance table available on request


## ② Matt effect for enhanced design



# ECO-RESPONSIBLE SOLUTION

**TARALAY PREMIUM:** eco-designed flooring based on a lifecycle analysis model to minimise the product's environmental impact at every stage of its life.

Eco-responsible commitment ensures **TARALAY PREMIUM** meets HQE standards and respects LEED principles.

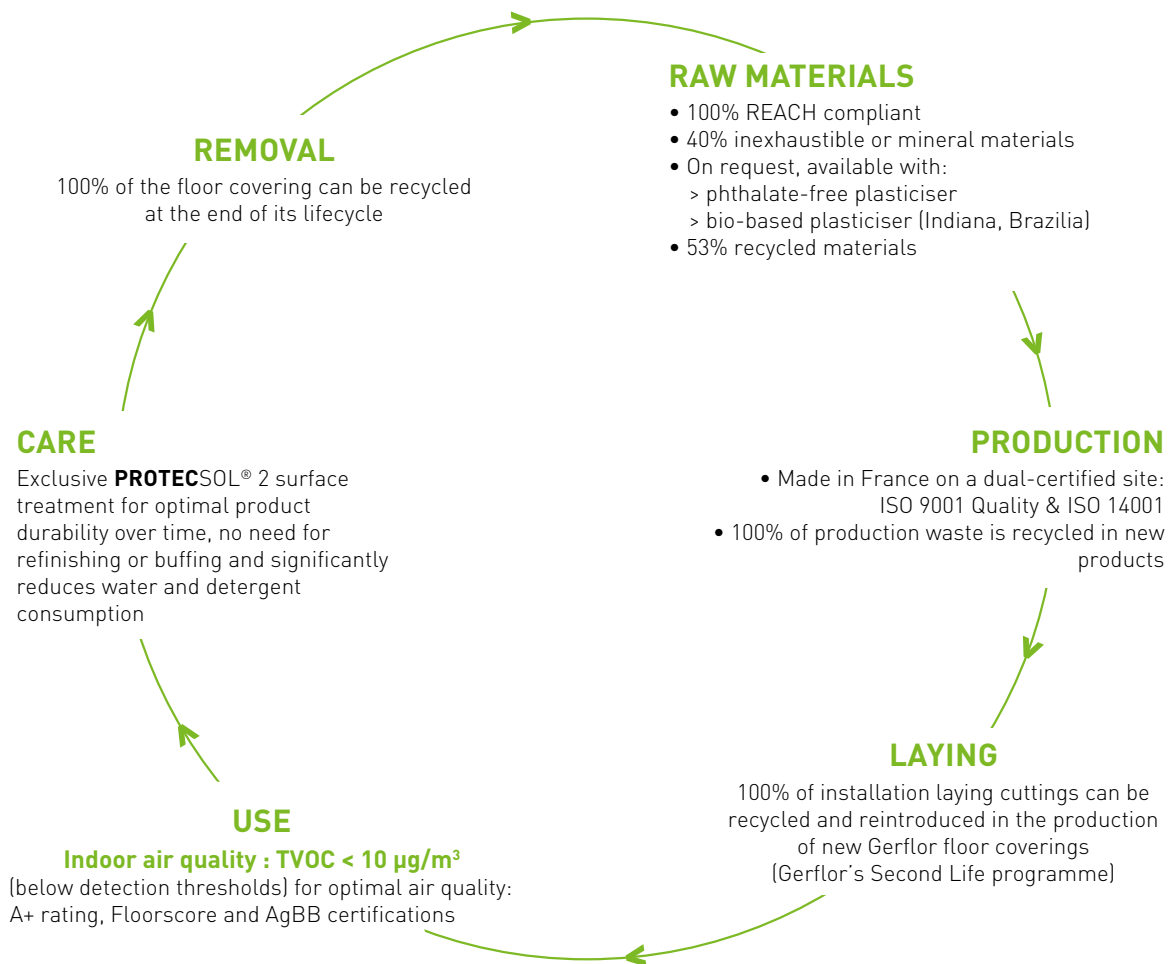



acoustic comfort

indoor air quality

optimal hygiene

# ECO-FRIENDLY PRODUCT CONSTRUCTION

# COMPLETE SOLUTION

## 100% COORDINATION FLOORS / WALLS / ACCESSORIES


### WALL SOLUTIONS

#### 100% SAFETY

LINEA'TOUCH handrail

#### 100 % PROTECTION

MURAL ULTRA combined with LINEA'PUNCH bumper

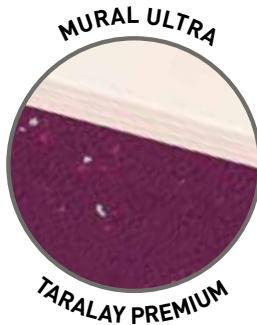


#### 100 % WATERPROOF

Perfect hot-welded joint between floor and wall

#### 100% HYGIENIC

- No areas where particles or bacteria can stagnate
- Easy to clean

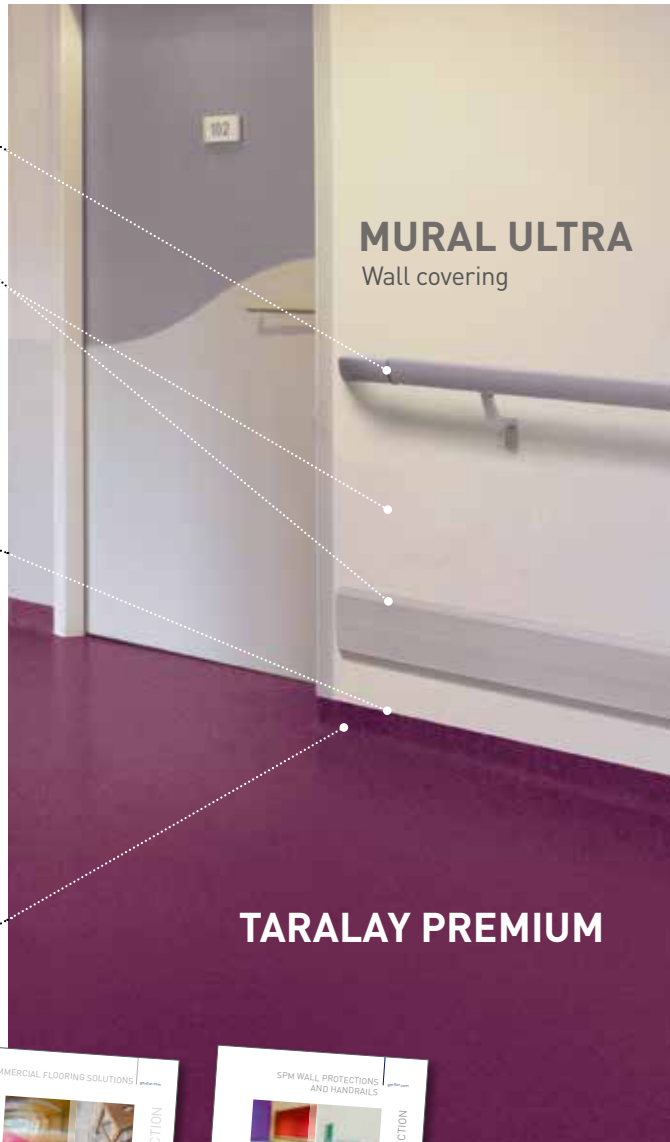

**MURAL ULTRA**  
Wall covering

**TARALAY PREMIUM**



For further information, see the SPM and «Commercial flooring solutions» catalogues.


Contact Gerflor : Tel. +33(0)4 74 05 40 00




## STAIRCASE SOLUTIONS

- Stair nosing

**100% LANDING/  
STAIR HARMONY**



PVC



ALU




- Complete step

**TARASTEP**



## ACCESSIBILITY SOLUTIONS

- Warning strips
- Orientation strips

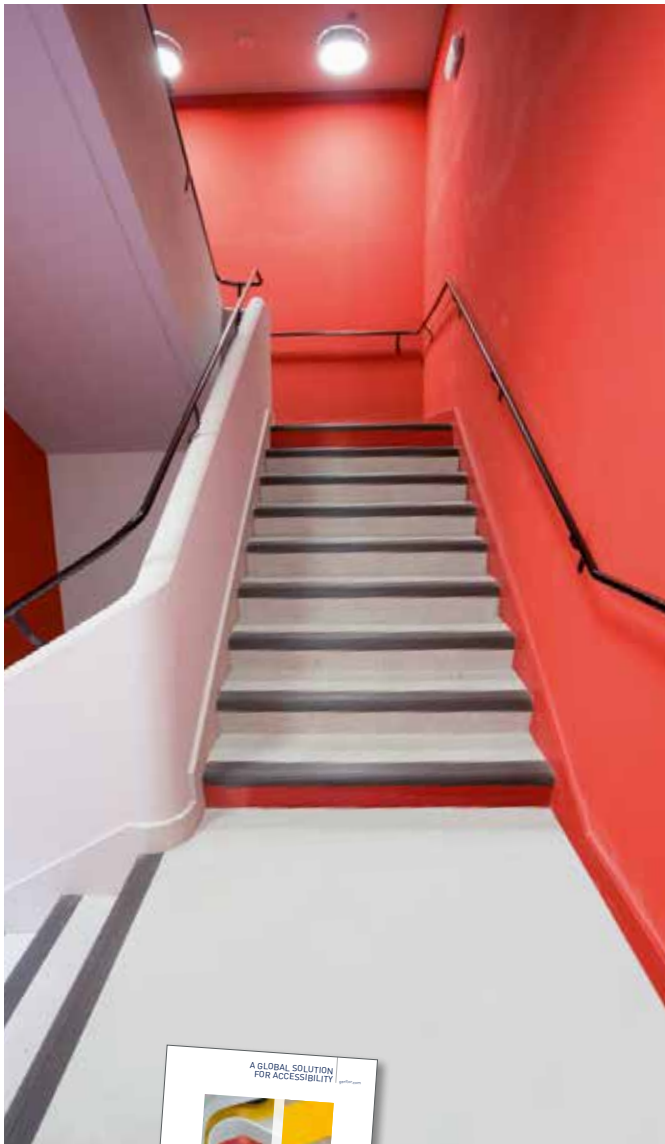

*For further information, see  
the «A global solution for  
accessibility» brochure*

# GERFLOR, THE PARTNER FOR ALL YOUR PROJECTS!

## MAKE LIFE EASIER WITH OUR EXPRESS DEPARTMENT

If you have technical questions or would like to request samples or documentation, contact:




By email: [gerflorcontract@gerflor.com](mailto:gerflorcontract@gerflor.com)

By phone: **+33(0) 474 054 000**

By fax: **+33(0) 474 050 313**


## WIDE RANGE OF ACCESSORIES




handrails



wall coverings  
and protection



entrance  
mats



skirtings

## TRAINING CENTRE OPEN TO ALL PROFESSIONALS

Dedicated to training young professionals and providing CPD for experienced professionals.

## MADE-TO-MEASURE TECHNICAL SUPPORT

Our technicians will come to you to provide on-site support



## ONLINE SERVICE

In just a few clicks, you'll find a whole range of tools to make your life easier on our web site.

### Welding rod and flooring matching tool

<http://www.gerflor.com/services-professionals/welding-rods-matching.html>



### Virtual library

See our documentation on line.

<http://www.gerflor.com/services-professionals/virtual-library.html>

### Design studio: real-time simulations

#### Interior Designer

Choose your interior, insert your Gerflor floor covering and see the finished effect in situ on:

<http://www.gerflor.com/services-professionals/interior-designer.html>



#### My Taralay

This GERFLOR exclusive service gives you freedom to create your own floor covering for unique interior design projects.

There are up to 400,000 possible combinations on:

<http://www.gerflor.com/services-professionals/mygerflor.html>



### Customised floorings, logos...



Contact us for waterjet cutting

# TECHNICAL DATA



TARALAY PREMIUM  
COMPACT

TARALAY PREMIUM  
COMFORT

## DESCRIPTION

DESCRIPTION			TARALAY PREMIUM COMPACT	TARALAY PREMIUM COMFORT
Total thickness	EN 428	mm	2.00	3.00 - 3.30
Thickness of wearlayer	EN 429	mm	> 1	> 1
Weight	EN 430	g/m <sup>2</sup>	2580 - 2680	2800 - 3260
Width of sheet	EN 426	cm	200	200
Length of sheet	EN 426	lm	20	25

## CLASSIFICATION

DESCRIPTION			TARALAY PREMIUM COMPACT	TARALAY PREMIUM COMFORT
Norm / Product specification	-	-	EN 649	EN 651
European classification	EN 685	class	34-43	34-42
Fire rating	EN 13501-1	class	Bfl-s1	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance <sup>(1)</sup>	DIN 51 130	class	R10	R10

## PERFORMANCES

DESCRIPTION			TARALAY PREMIUM COMPACT	TARALAY PREMIUM COMFORT
Wear resistance	EN 660.2	mm <sup>3</sup>	≤ 2.0	≤ 2.0
Wear group	EN 649 / EN 651	group	T	T
Type Binder content	ISO 10582	type	I	-
Dimensional stability	EN 434	%	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN 433	mm	≤ 0.10	≤ 0.20
Residual indentation (value)	-	mm	≈ 0.02	≈ 0.06
Castor chair test (type W)	EN 425	-	OK	OK
Impact sound insulation	EN ISO 717-2	dB	8	16
Thermal conductivity	EN 12 524	W/(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	Protocolsol® 2	Protocolsol® 2
Chemical product resistance <sup>(2)</sup>	EN 423	-	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) <sup>(3)</sup>	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth

## ENVIRONMENT / INDOOR AIR QUALITY

DESCRIPTION			TARALAY PREMIUM COMPACT	TARALAY PREMIUM COMFORT
TVOC after 28 days	ISO 16000-6	µg / m <sup>3</sup>	<10	<10
Certification	-	-	Floorscore™	Floorscore™

## CE MARKING


CE	EN 14041		

(1) For lifetime sustainable wet resistance, please refer to Tarasafe ranges.

(2) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

(3) The implementation of an effective cleaning regime is the most important defence against infection.

## TARALAY PREMIUM COMPACT

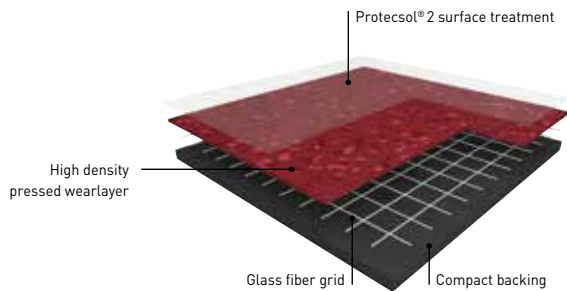

### Osmoz - Indiana - Metallica - Brazilia - Costa Rica - Fusion

**TARALAY PREMIUM COMPACT** is a multilayered calendered and pressed vinyl floorcovering, with no filler and a group T wear rating, available in 2 m wide sheet.

The product comprises a **> 1 mm thick, pure vinyl wear layer incorporating very densely pressed coloured chips, with a mat finishing and without a transparent wear layer.**

The product comprises a compact backing which is calendered, pressed and reinforced with a glass fibre grid yielding a **8 dB sound insulation, an indentation resistance of 0.02 mm and a rolling heavy loads easiness.**

**TARALAY PREMIUM COMPACT** is treated with **Protecsol®2**, a surface treatment obtained by UV laser crosslinking. This Protecsol®2 ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

It is composed of 40 % of minerals and inexhaustible materials.

It is made of 100 % controlled recycled materials.


It does not contain any heavy metals or CMR 1&2 and they are 100 % compliant with REACH.

On demand, Taralay Premium is available with phthalate free.

The products emission rate of volatile organic compounds is **< 10 µg/m³ (TVOC after 28 days – ISO 16000-6).**

It is 100% recyclable.

## TARALAY PREMIUM COMFORT

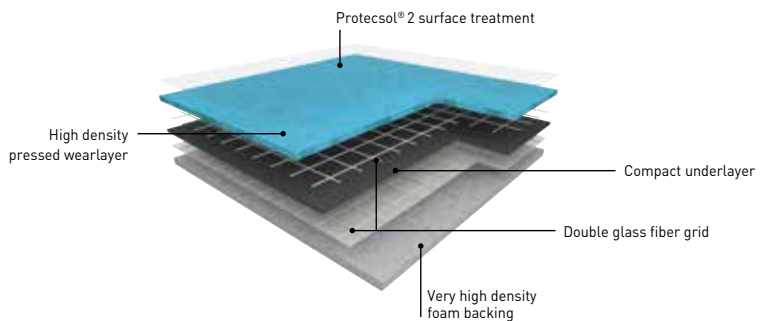

### Osmoz - Indiana - Metallica - Brazilia - Costa Rica

**TARALAY PREMIUM COMFORT** is a multilayered calendered and pressed vinyl floorcovering, with no filler and a group T wear rating, available in 2 m wide sheet.

The product comprises a **> 1 mm thick, pure vinyl wear layer incorporating very densely pressed coloured chips, with a mat finishing and without a transparent wear layer.**

The product comprises a compact backing which is calendered, pressed and a Very High Density (VHD) foam backing. It is reinforced with a double glass fibre grid yielding a **16 dB sound insulation, an indentation resistance of 0.06mm and a rolling heavy loads easiness.**

**TARALAY PREMIUM COMFORT** is treated with **Protecsol®2**, a surface treatment obtained by UV laser crosslinking. This Protecsol®2 ensures easy maintenance and eliminates permanently the need for acrylic emulsion (metallisation). It avoids staining of chemical products used in healthcare like iodine alcohol, Betadine, eosin and anti-bacterial hand gel.

It is composed of 40 % of minerals and inexhaustible materials.

It is made of 100 % controlled recycled materials.

It does not contain any heavy metals or CMR 1&2 and they are 100 % compliant with REACH.

On demand, Taralay Premium is available with phthalate free.

The products emission rate of volatile organic compounds is **< 10 µg/m³ (TVOC after 28 days – ISO 16000-6).**

It is 100% recyclable.

# NCS & LRV

DESIGNS		COLORS	NCS	LRV
BRAZILIA	4481	ESTANCIA	4050-R70B	9,5
BRAZILIA	3707	PARAIBA	7005-R80B	10,1
BRAZILIA	4136	SAO LUIS	2060-Y80R	16,2
BRAZILIA	4478	COPACABANA	4030-B	16,4
BRAZILIA	8062	CAMPINAS	6010-Y40R	17,1
BRAZILIA	4329	BACABAL	4005-Y80R	25,9
BRAZILIA	8157	GOIAS	2060-Y50R	29,8
BRAZILIA	3709	CEARA	4005-R80B	30,4
BRAZILIA	4477	MACEIO	2030-B10G	35,7
BRAZILIA	4729	MATO GROSSO	3010-Y10R	39,9
BRAZILIA	8577	AMAZONAS	2040-G70Y	44,0
BRAZILIA	8269	IPANEMA	2040-Y20R	47,3
BRAZILIA	3734	ALMERIM	2000-N	52,3
BRAZILIA	4342	JUARA	2002-Y50R	52,5
BRAZILIA	8736	RECIFE	2005-R80B	54,8
BRAZILIA	8386	BOA VISTA	1002-Y50R	63,7
COSTA RICA	4746	JAGUAR	6502-B	11,7
COSTA RICA	8183	VOLCAN	3060-Y90R	12,3
COSTA RICA	8191	MESETA	6005-Y80R	17,4
COSTA RICA	4752	SOMBRA	4502-Y	26,6
COSTA RICA	4454	ARA	2030-B	30,8
COSTA RICA	8395	CABALLO	1515-Y30R	47,2
COSTA RICA	4794	TALAMANCA	2500-N	49,2
COSTA RICA	8387	BALSA	1505-Y50R	52,0
COSTA RICA	4743	NUBLO	1500-N	60,6
FUSION	4748	KAMCHATKA	8000 - N	9,3
FUSION	4745	LOPEVI	4502-B	28,9
FUSION	4749	VESUVIO	3500 - N	36,3
FUSION	4741	LANZAROTE	2005-Y40R	46,3
FUSION	4753	COTOPAXI	1502-B	62,0
INDIANA	4145	MADURA	5040-R20B	6,1
INDIANA	8837	SONGO	8000-N	7,3
INDIANA	3705	SUMBAWA	7502-Y	9,8
INDIANA	4141	ZANZIBAR	2570-Y90R	11,3
INDIANA	4133	AGALEGA	6010-R50B	12,2
INDIANA	4476	WATTARU	5030-R90B	12,4
INDIANA	8057	SOCOTRA	6010-Y70R	12,9
INDIANA	4146	MOHELI	3060-Y80R	13,9
INDIANA	4004	PAGO	6502-B	15,0
INDIANA	4135	ALDABRA	4020-R60B	18,0
INDIANA	8059	NICOBAR	5010-Y60R	21,8
INDIANA	8053	ANAMBAS	5005-Y20R	22,9
INDIANA	4142	PENANG	1080-Y60R	23,5

DESIGNS		COLORS	NCS	LRV
INDIANA	4003	TAO	4502-B	27,5
INDIANA	4469	PEMBA	3040-B40G	27,9
INDIANA	8262	RODRIGUES	3020-Y30R	33,8
INDIANA	4029	BADUNA	3005-Y20R	39,9
INDIANA	4140	MAHE	2020-R10B	40,4
INDIANA	4475	FELIDU	2030-B	41,5
INDIANA	4526	LASIA	1050-G	41,5
INDIANA	3788	NAURU	2502-Y	42,0
INDIANA	4343	TOKELAU	2005-Y50R	46,7
INDIANA	4015	GUINEA	2030-G70Y	50,0
INDIANA	8242	MASIRAH	0540-Y20R	61,8
INDIANA	4002	MANUA	1502-B	63,0
INDIANA	4009	TUFOA	1005-Y20R	66,3
INDIANA	8254	SAMUI	0550-Y	69,7
INDIANA	4001	OFU	0502-Y	88,7
METALLICA	9719	ECLIPSE	8502-B	11,3
METALLICA	9127	METEORITE	3060-R	11,6
METALLICA	9415	CELESTE	4020-R90B	20,9
METALLICA	9002	PULSAR	5010 - Y30R	24,8
METALLICA	9302	ATLAS	4030-Y40R	27,6
METALLICA	9310	TETHYS	4502-Y	28,1
METALLICA	9745	COSMIC	5502-B	28,4
METALLICA	9506	HIMALIA	3040-G40Y	30,1
METALLICA	9330	MOON	3005-Y50R	47,9
METALLICA	9753	ENERGY	2502-G	56,3
OSMOZ	4348	ALPAGA	2000-N	51,9
OSMOZ	3792	STORM GREY	3502-B	36,3
OSMOZ	3791	SLATE GREY	5500-N	21,7
OSMOZ	4344	IVORY	1502-Y	61,2
OSMOZ	4347	RAPHIA	2005-Y40R	47,2
OSMOZ	4349	ANGORA	3005-Y50R	42,2
OSMOZ	8073	COCOA	7005-Y50R	10,8
OSMOZ	4143	ROSE SHOCKING	2060-R20B	18,0
OSMOZ	4148	SCARLET RED	1080-Y80R	17,5
OSMOZ	4149	MANDARIN	2060-Y50R	28,1
OSMOZ	4527	BAMBOO	1060-G50Y	49,4
OSMOZ	4496	PACIFIC BLUE	1040-B	37,0
OSMOZ	4495	ATLANTIC BLUE	3040-R90B	23,4
OSMOZ	8255	GOLDEN SUNSET	1070-Y10R	44,7
OSMOZ	4350	ELEFANT	3500-N	33,1
OSMOZ	4351	GREIGE	5005-Y50R	25,8
OSMOZ	3793	CASHMERE GREY	2005-R80B	48,7



**ASIA:** Gerflor Asia

Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998

e-mail: gerflorasia@gerflor.com

**AUSTRALIA/NEW ZEALAND:** Gerflor Australasia Pty. Ltd

Australia Tel: 1 800 060 785 - New Zealand Tel: 0 800 630 119

e-mail: gerflor@gerflor.com.au

**AUSTRIA/SWITZERLAND:** Gerflor GmbH

Tel: +43 (0)7229/70800-0 - Fax: +43 (0)7229/70800-218

e-mail: austria@gerflor.com - switzerland@gerflor.com

**BELGIUM/LUXEMBURG:** Gerflor Benelux

Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14

e-mail: gerflorbe@gerflor.com

**CANADA:** Gerflor International

Tel: +1 438 333 0752 - Fax: +1 438 380 5425

e-mail: gerflorcanada@gerflor.com

**CHINA:** Gerflor Floorings (China) Co. Ltd.

Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998

e-mail: gerflorchina@gerflor.com

**FINLAND:** Gerflor Oy

Tel: +358 (0) 10 617 5150 - Fax: +358 (0) 10 617 5152

e-mail: info@gerflor.fi

**FRANCE:** Gerflor - Service Express:

**N°Azur 0 810 569 569** **N°Azur FAX 0 810 569 570**

e-mail: contactfrance@gerflor.com

**GERMANY:** Gerflor Mipolam GmbH

Tel: +49 (0) 22 41-25 30-0 - e-mail: GerflorMipolam@Gerflor.com

Kunden-Service: kundenservice@gerflor.com

Tel: +49 (0) 22 41-25 30-136 - Fax: +49 (0) 22 41-25 30-100

SAT Service und Anwendungstechnik: Technik@Gerflor.com

Tel: +49 (0) 22 41-25 30-555 - Fax: +49 (0) 22 41-25 30-550

**IRELAND:** Gerflor Ltd

Tel: +353 (0) 42 96 61431 - Fax: +353 (0) 42 96 61759

e-mail: gerflorirl@gerflor.com

**ITALY:** Gerflor S.p.A.

Tel +39 02 90 40 10 - Fax +39 02 90 42 74 84

e-mail: gerfloritalia@gerflor.com

**LATIN AMERICA** (Brazil): Gerflor América Latina

Tel: +55 11 38 48 20 20 - Fax: +55 11 38 48 20 23

e-mail: gerflor@gerflor.com.br

**MIDDLE EAST:** Gerflor Middle East

Tel: +966 13 847 1779 - Fax: +966 13 847 1781

Email: info@gerflorme.com

**NETHERLANDS:** Gerflor Benelux

Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89

e-mail: gerflornl@gerflor.com

**OTHER COUNTRIES:** Gerflor International

Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

**POLAND:** Gerflor Polska Sp z o.o

Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33

e-mail: info@gerflor.pl

**PORTUGAL:** Gerflor Iberia, SA

Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44

e-mail: gerflorportugal@gerflor.com

**RUSSIA:** Gerflor zao

Tel / Fax: +7 495 785-23-71

e-mail: gerflorrussia@gerflor.ru

**SCANDINAVIA:** Gerflor Scandinavia a.s.

Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80

e-mail: gerflorscand@gerflor.no

**SPAIN:** Gerflor Iberia, SA

Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85

e-mail: gerfloriberia@gerflor.com

**UNITED KINGDOM:** Gerflor Ltd

Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647

e-mail: contractuk@gerflor.com

**USA:** Gerflor North America

Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753

e-mail: info@gerflorusa.com

gerflor.com

ARCHITECTURE  
DECORATION  
SPORT  
TECHNOSPECIFIC

RC Lyon B 726 580 152 - jpe - Printed in CEE 209 406 - 11/2015 - Prix indicatif documentation : 2,30€

**Gerflor.** Don't forget our complementary ranges!



Handrails



Wall Coverings & Protections



Entrance mats



Skirlings & Profiles

and Be **CONNECTED!**



www.gerflor.com



**Gerflor**  
theflooringroup